

NICHIYU

ELECTRIC TOWING TRACTOR

Model: NTT50-70 / NTT75-70

Rated drawbar pull: 490N / 735N

Capacity: 2000kg / 3000kg

**A compact tractor
with a small turning radius
offering smooth, powerful travel
and easy operation.**



**The smooth and powerful acceleration by the AC control system
ensures towing without shock to the trailer.**

ELECTRIC TOWING TRACTOR NTT50-70 / NTT75-70

Operator Comfort

The round steering wheel gives this tractor a very car-like driving sensation.

The vehicle features an accelerator-off regenerative braking system that gently takes effect as you release the accelerator pedal. As a result, the braking effort is greatly reduced. In addition, the rearview mirrors and turn signals are provided as standard for enhanced safety.



Compact Design

The tractor has an overall length of only 1345 mm.

What's more, the minimum turning radius of only 1375 mm makes this vehicle ideal for use in confined spaces.



Main Options

- Battery side-loading specification
- Overhead guard (with sheet)
- Coupler lever
- Rear combination lamp
- Bumper
- Suspension seat
- Hour meter


Operation Interlock System

Traveling operation is locked out.

For operator's safety, traveling is automatically locked when the operator is not properly seated.



SPECIFICATIONS

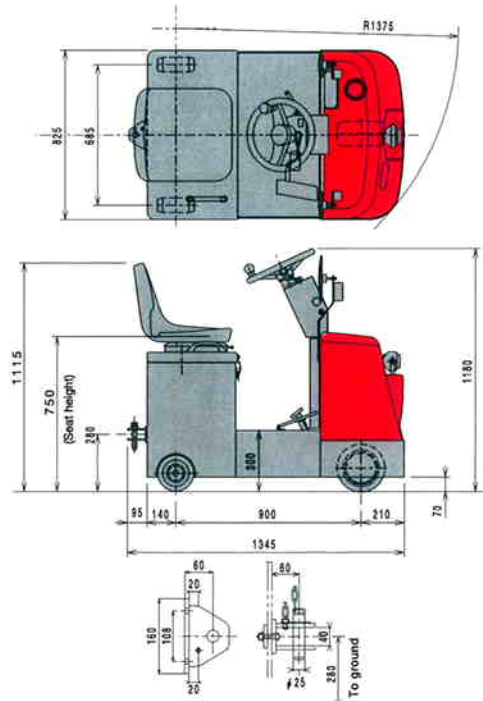

Models		NTT50-70	NTT75-70
Rated Drawbar Pull	N/[kgf]	490/[50]	735/[75]
Towing Capacity	kg	2000	3000
Travel Speed	Laden	Km/h	7.0
	Unladen	Km/h	8.0
Control System		Inverter Control	
Motor	Traction	Kw	1.6
Battery (24V)	STD	Ah/5HR	216
	OPT	Ah/5HR	250
Charger	Automatic Stationary Charger		
	STD	φ/V, kVA	3/200, 1.6
	OPT	φ/V, kVA	1/100, 2.1
	OPT	φ/V, kVA	3/400, 1.6
	Automatic Built-in Charger		
	OPT	φ/V, kVA	1/100, 2.1
Tyres	Front/Drive	φ235x120 Rubber 1 pc.	
	Rear/Load	φ178x73 Rubber 2 pcs.	
Service Weight (W/O Batt.)		Kg	375
Battery Weight Min./Max.		Kg	200/215
Change of Service Weight	Large Battery	Kg	Service Weight +15
	Built-in Charger	Kg	Service Weight +15

ECO-LOGISTICS since 1937

NICHYU

NIPPON YUSOKI CO., LTD.

1-1, 2-chome, Higashikotari, Nagaokakyo-shi, Kyoto 617-8585 Japan

Phone: +81-75-956-8622 Fax: +81-75-955-0480

URL: <http://www.nichiyunet.co.jp/>



JQA-QM3889
JQA-EM4909